

ProTack TW250



■ *A Quality Product Built To Meet
And Exceed The Customer's Demands.*

KEY FEATURES

- Heavy duty 12 GPM pump driven by a 5.5 hp Honda gas engine.
- 250 Gallon primary tank capacity.
- 10" fill spout and lid that seals and locks down.
- 40 feet of 1/2" hose on a heavy duty reel producing a work area 80 feet wide.
- 6' wand made of lightweight aluminum complete with replaceable tip.
- 9 gallon flush tank and 11 gallon waste tank




Technical Specifications

TW250

Shipping dimensions
in cubic feet (m³)
TW250

336 (9.5)

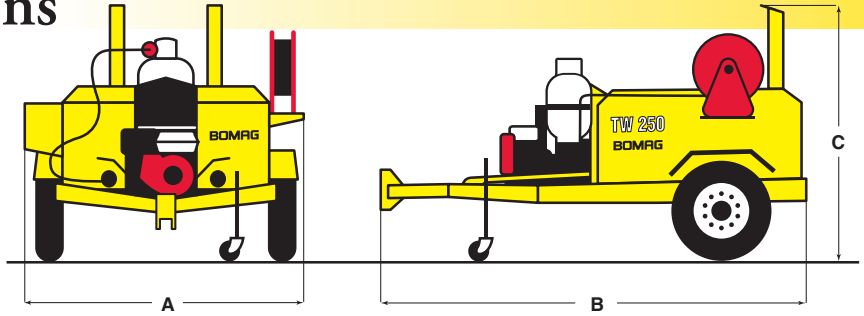

DIMENSIONS IN INCHES (MM)

	A	B	C
TW250	72 (1829)	124 (3353)	65 (1651)

Standard Equipment

- 5.5 hp Honda engine
- Direct drive asphalt pump
(12 GPM)
- 250 gallon primary tank capacity
- 3500 lb GVW axle with electric
trailer brakes with safety disconnect
and battery
- Trailer safety chains
- Adjustable hitch with swivel tongue
mounted jack
- Two each 50,000 btu vapor propane
burners and hand held starter torch
- Single propane bottle holder
and regulator
- 9 gallon solvent flushing reservoir
- 11 gallon waste reservoir
- 6 foot aluminum spray wand
(lightweight)
- Hose Reel with 40 foot 1/2" hose
- 10" filler lid and 2" draincock
- Material temperature Thermometer
- Adjustable Relief Valve to obtain
desired spraying pressure and volume

Optional Equipment

- 9 foot width spray bar assembly with
waste tank
- Overnight 110 volt electric heater
- Electric start engine
- Cab controlled (remote) electric
on/off for spray bar assembly

Technical data

Weights

Dry Weight.....	lbs (kg)	1450 (658)
Loaded Weight	lbs (kg)	3500 (1588)

Dimensions

Length	in (mm)	124 (3353)
Width	in (mm)	72 (1829)
Overall Height.....	in (mm)	65 (1651)
Tank Height	in (mm)	24 (610)
Loading Height.....	in (mm)	51 (1295)

Pump:

Delivery	gpm (lpm)	12 (45.4)
Type.....		Direct Drive
Speed	rpm	3600

Tires:

Size	225/75R15
Load Range.....	D
Quantity on Machine	2

Drive:

Engine Type.....	Honda
Model.....	GX160
Performance SAE J1349	5.5 (4.1) hp (kW)
Fuel	Gas

Service Capacities:

Fuel	gal (l)	1 (3.6)
Engine Oil.....	qts (l)	.6 (.6)

Technical modifications reserved. Machines may be shown with options.

B343H-1831 3M307JMTTP

BOMAG
FAYAT GROUP

BOMAG Americas, Inc.

2000 Kentville Rd. • Kewanee, IL 61443
Tel: 309 853-3571 • Fax: 309 852-0350